
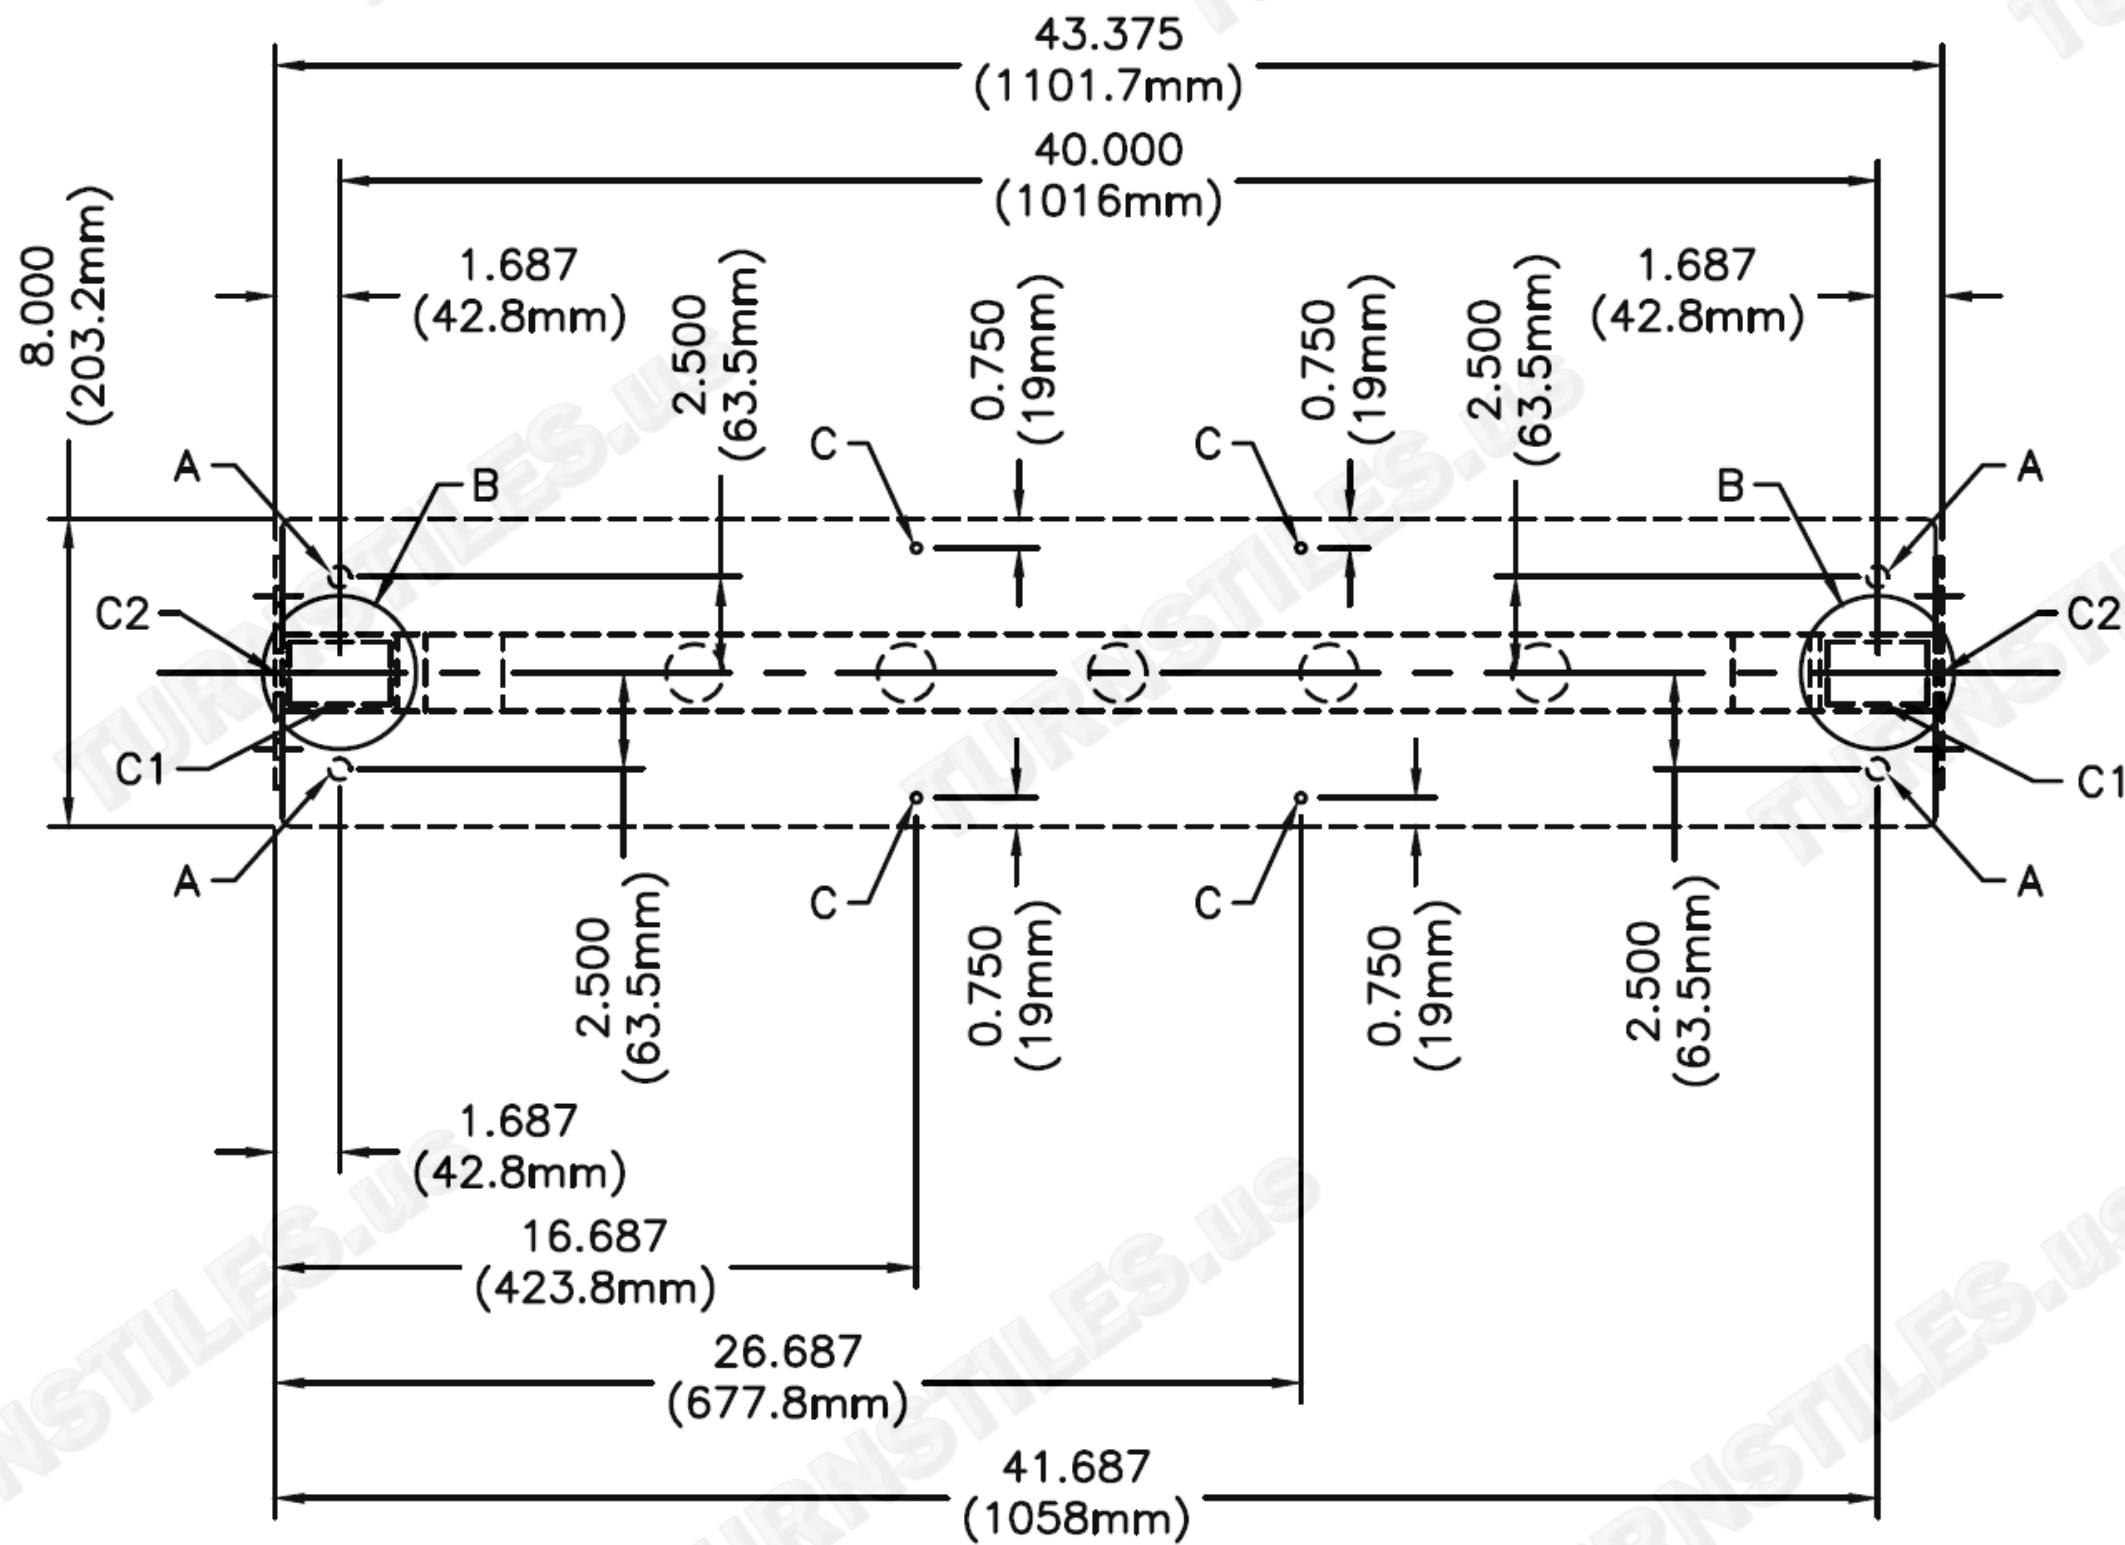


HS336-ADA CARBON STEEL\STAINLESS STEEL MODELS
HS336-ADA-MS CARBON STEEL\STAINLESS STEEL MODELS

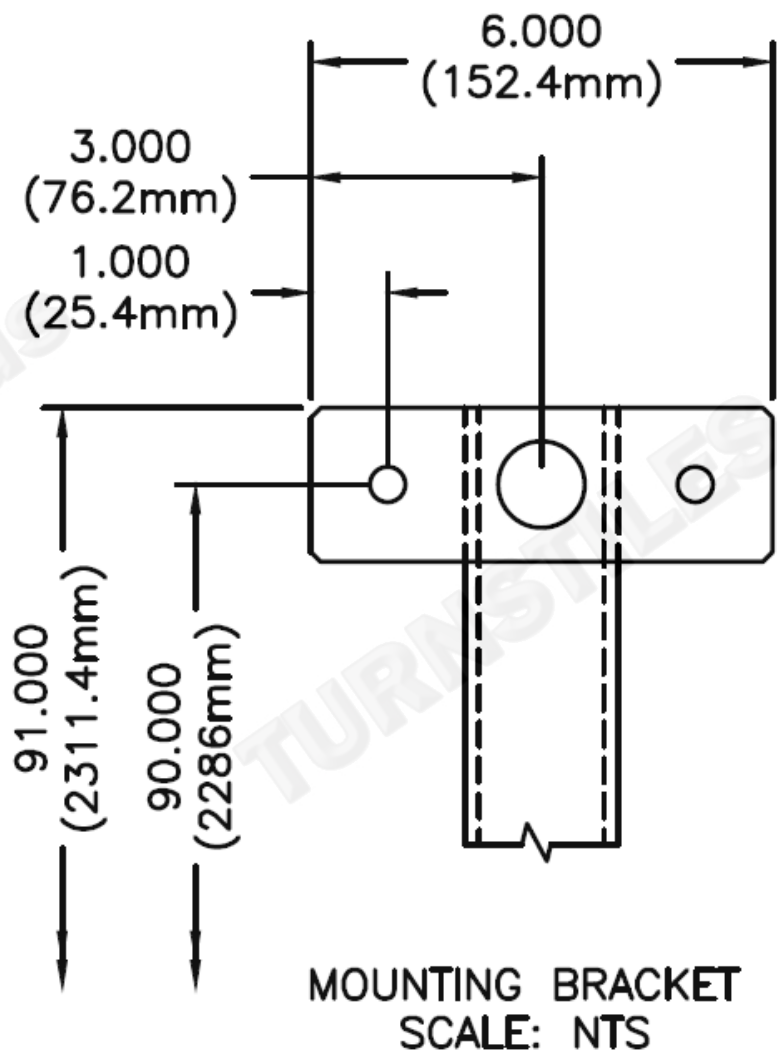


HS336-ADA NOTE:
GATE CAN BE EITHER RIGHT OR LEFT HANDED DIMENSIONS DO NOT CHANGE

ANCHOR POINTS
A= $\varnothing 0.500 \times 4.500$ STAINLESS STEEL CONCRETE ANCHOR QTY 4
B= $\varnothing 4.000 \times 6.000$ DEEP CORE DRILLED HOLE QTY 2
C= $\varnothing 0.250$ FLAT HEAD TAPCON QTY 4

SUGGESTED CONDUIT LOCATION
C1= THROUGH GATE FRAME LEGS (2.000 x 3.000 x 0.187 WALL)
C2= THROUGH GATE MOUNTING BRACKET (TYP. BOTH SIDES)

CONCRETE PAD NOTE:
POUR PAD 4.000 [102mm] - 6.000 [152mm] THICK,
AND ENSURE IT IS LEVEL ± 0.125 [3mm]

FIRST DRAWN	BY
09-24-18	TOG
REVISED	BY
10-20-25	SOE
COPYRIGHT © TURNSTILES.US	
Copyright © Turnstiles.us All rights reserved. Reproduction or translation of this work without the express written permission of TURNSTILES.US is unlawful and is an infringement of intellectual property belonging to TURNSTILES.US.	
All drawings and/or designs are restricted for use exclusively with a purchase, installation, and/or support from Turnstiles.us. Any other use of these materials is a violation of copyright law. Request for additional information should be addressed to the Legal Department, Turnstiles.us.	



TURNSTILES.us

SECURING THE USA and the GLOBE since 1989

www.TURNSTILES.us
Call: 303-670-1099 | Text: 303-918-9787
patrick.mcallister@turnstiles.us

EQUIPMENT DETAIL & DIMENSIONS	
HS336-ADA Gate Anchor, Base, and Concrete Pad Detail	
DRAWING:	HS336-ADA Gate A-B-C DET
DATE:	10-20-25
PAGE:	1 OF 1