




AG30T Full Height Turnstile

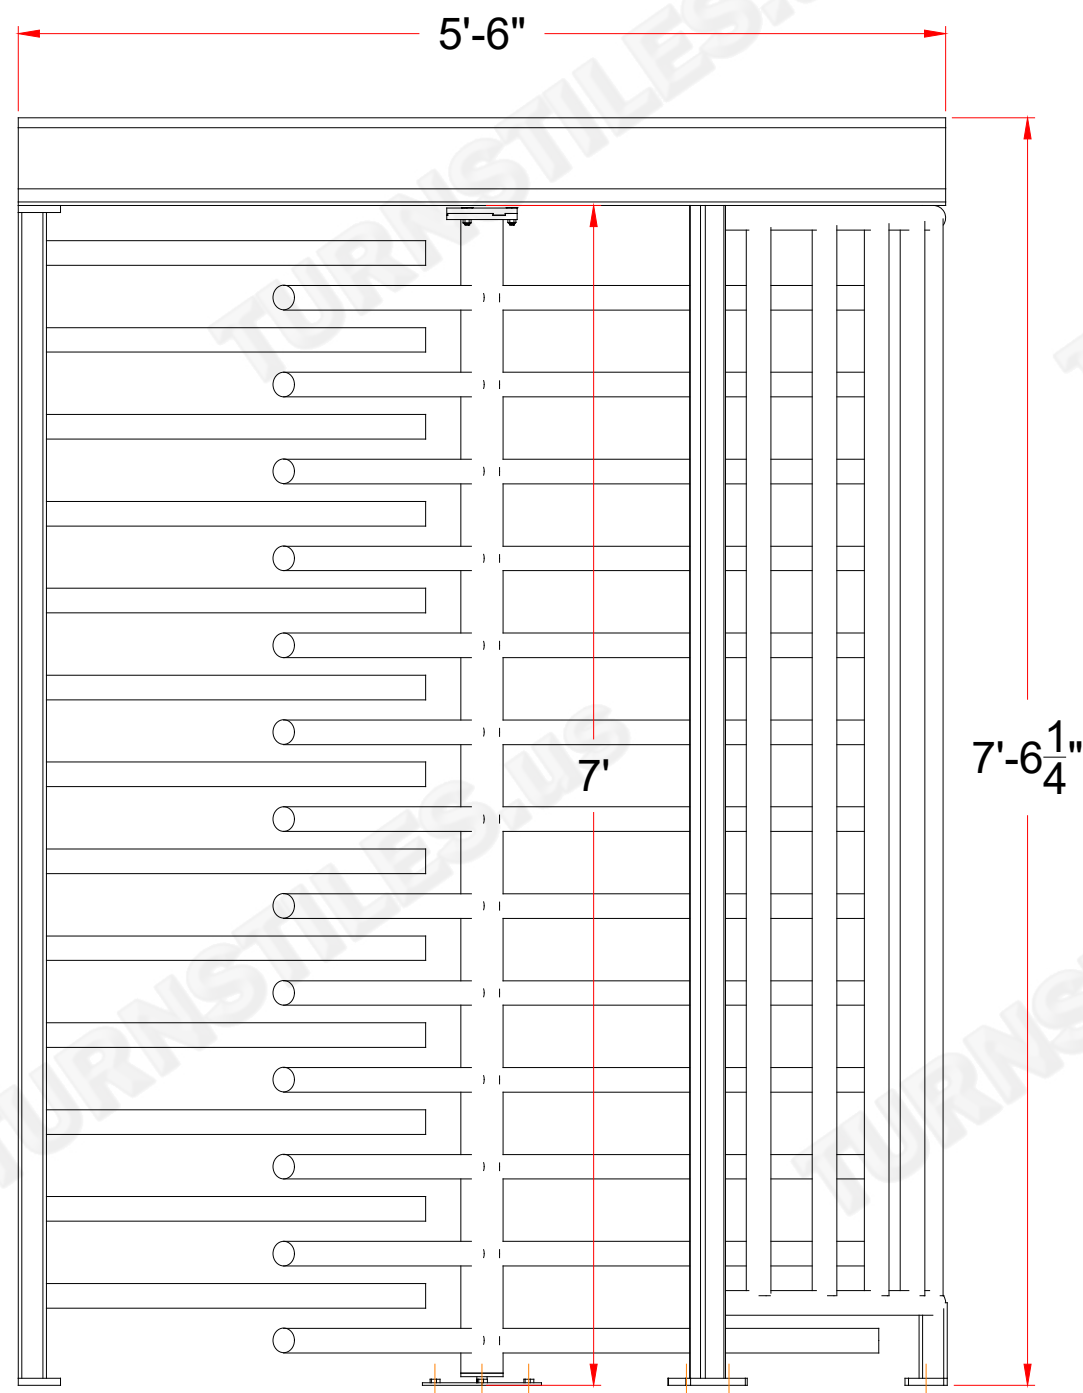


ELEVATION

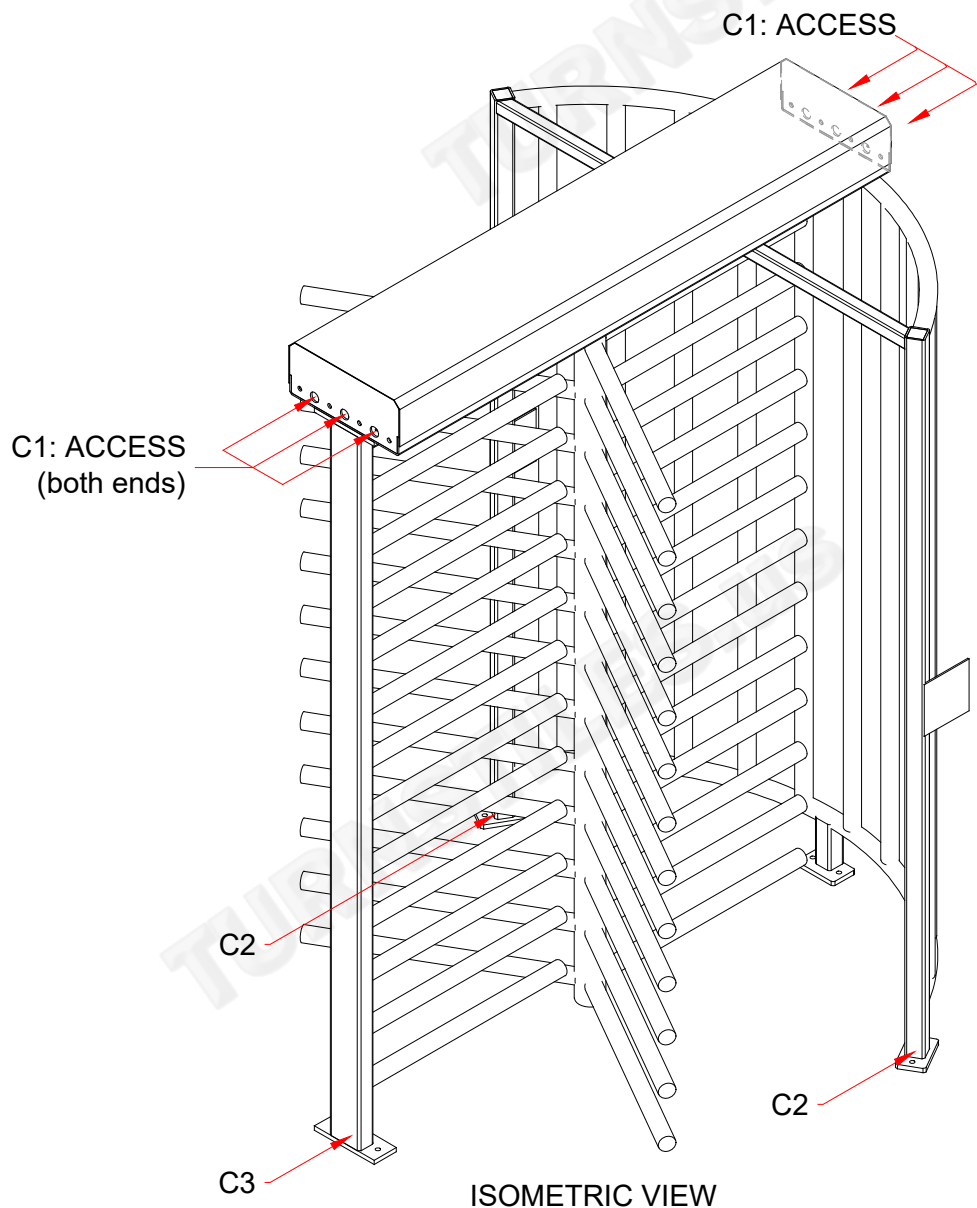

ISOMETRIC VIEW

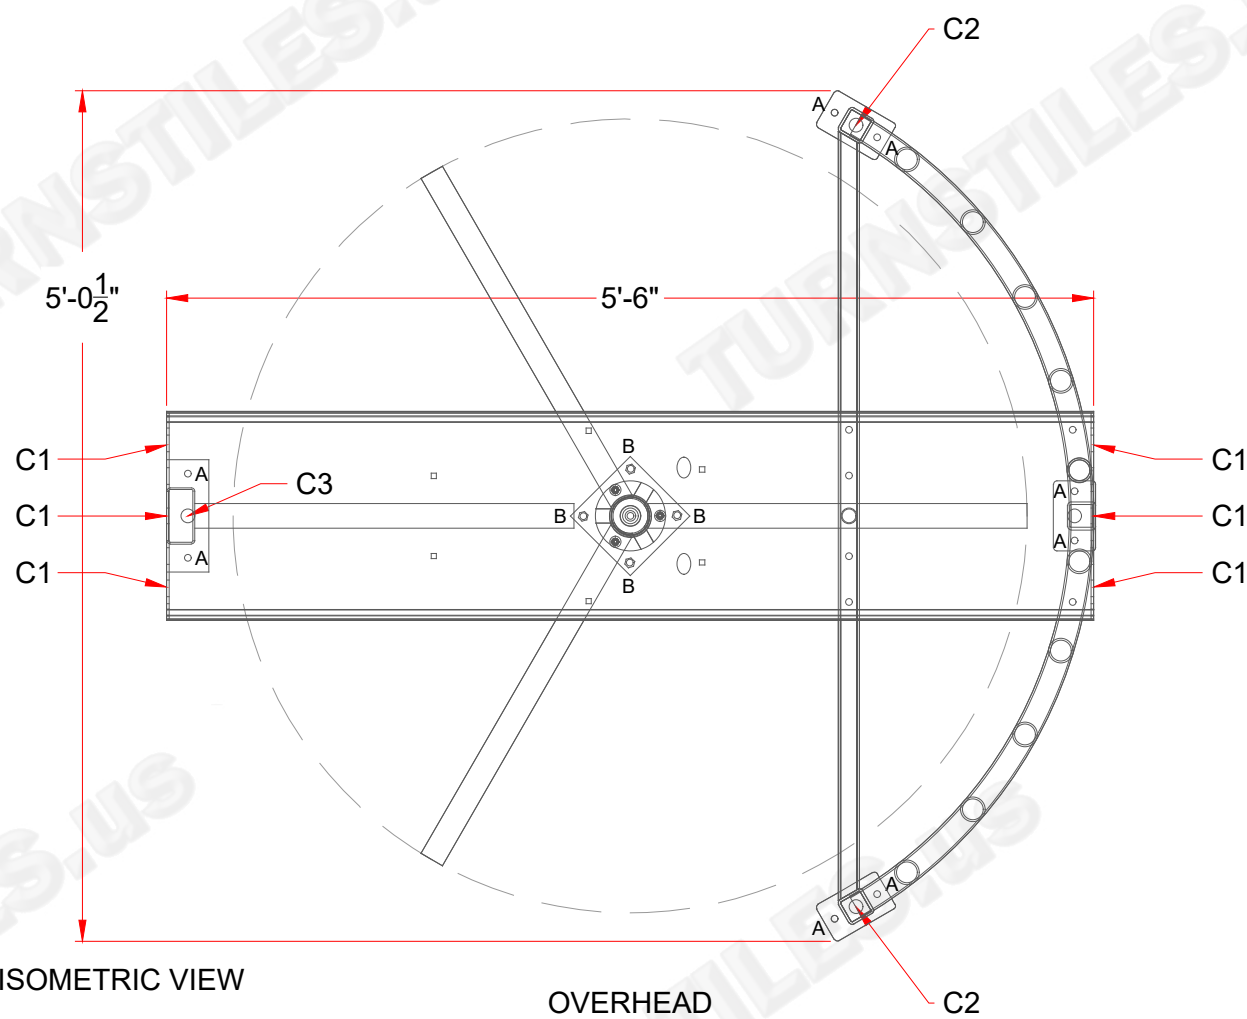

OVERHEAD

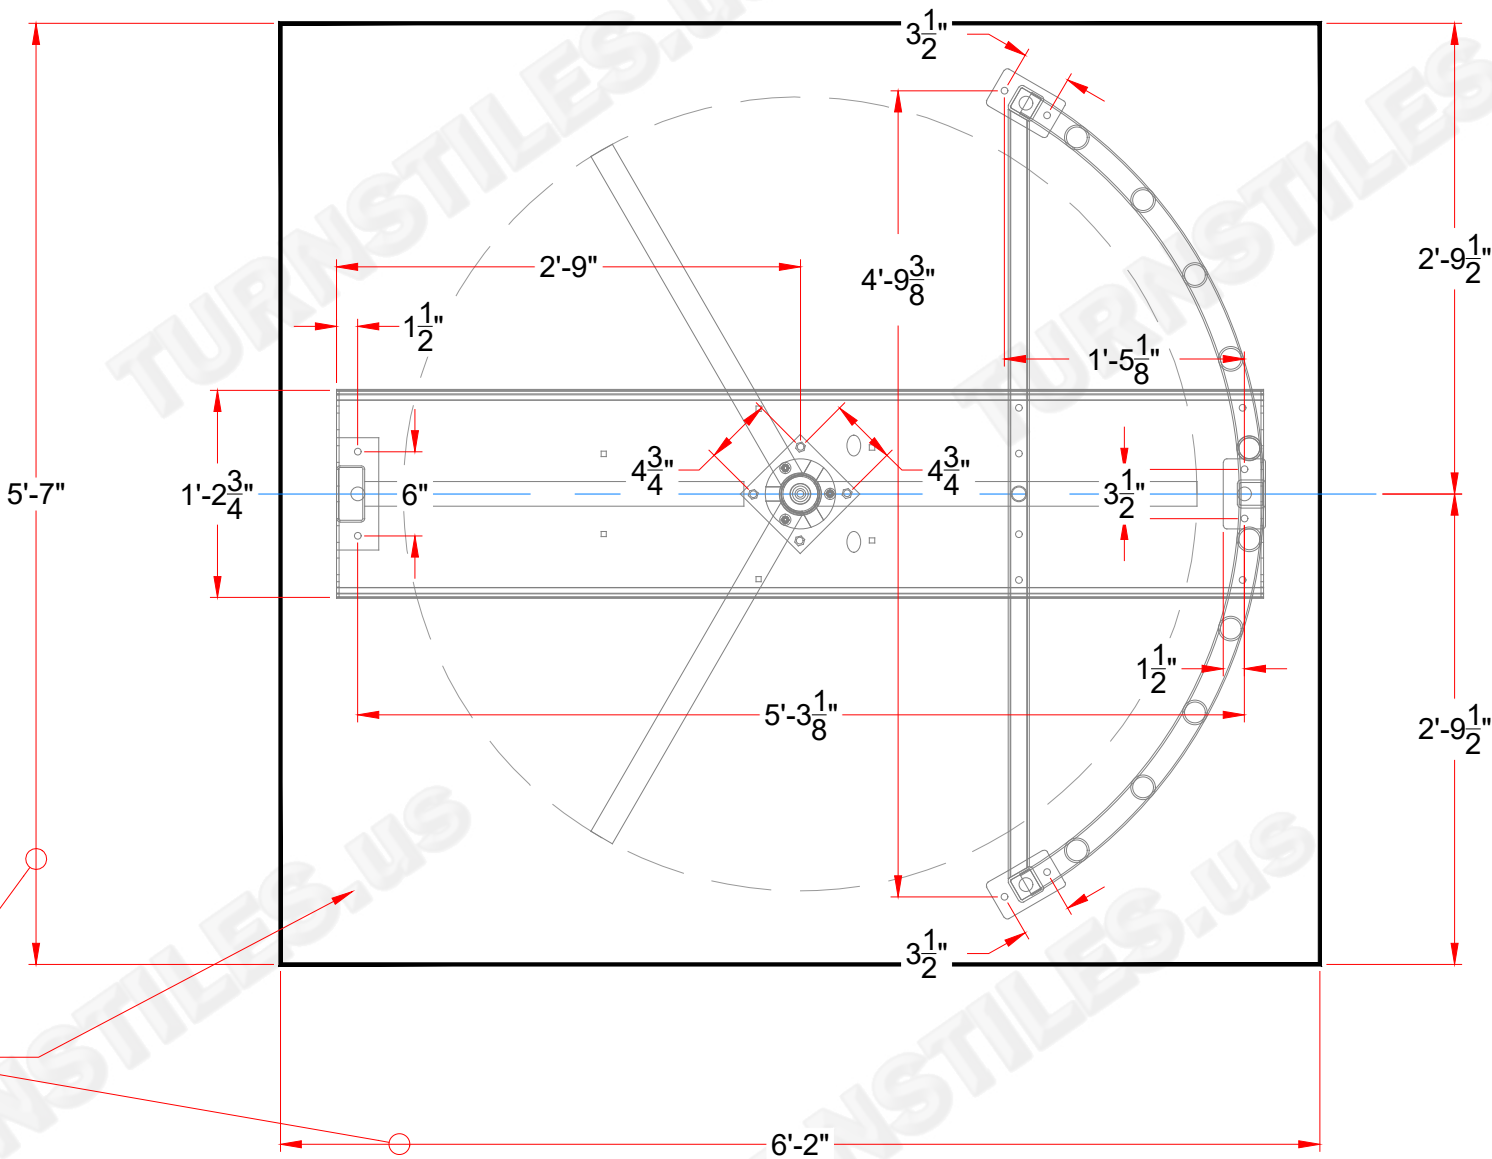

* PAD DIMENSIONS SHOWN ARE MINIMUM RECOMMENDATION

ANCHOR POINTS
A = Ø0.375" x 4.5" STAINLESS STEEL CONCRETE ANCHOR QTY 8 CAGE & COMB
B = Ø0.375" x 4.5" STAINLESS STEEL CONCRETE ANCHOR QTY 4 CENTER ROTOR
SUGGESTED CONDUIT LOCATION
C1 = THROUGH TOP CHANNEL END CAPS (TYP BOTH SIDES)
C2 = THROUGH VERTICALS OF CAGE
C3 = THROUGH VERTICAL OF COMB
POUR PAD 4.5" - 6" THICK [101.6mm-152.4mm]
AND INSURE IT IS LEVEL ± 1/25" [3.1MM]

FIRST DRAWN	BY
07-17-18	TOG
REVISED	BY
11-21-24	CJC
COPYRIGHT © TURNSTILES.US	
Copyright © Turnstiles.us All rights reserved. Reproduction or translation of this work without the express written permission of TURNSTILES.US is unlawful and is an infringement of intellectual property belonging to TURNSTILES.US.	
All drawings and/or designs are restricted for use exclusively with a purchase, installation, and/or support from Turnstiles.us. Any other use of these materials is a violation of copyright law. Request for additional information should be addressed to the Legal Department, Turnstiles.us.	

**TURNSTILES.US**

SECURING THE USA and the GLOBE since 1989

www.turnstiles.us
Call: 303-670-1099 | Text: 303-918-9787
patrick.mcallister@turnstiles.us

EQUIPMENT DETAIL & DIMENSIONS	
AG30T Full Height Turnstile Anchor, Base, and Conduit - Pad Detail	
DRAWING:	AG30T Turnstile A-B-C DET
DATE:	11-21-24
PAGE:	1 OF 1