


OUTLAW INDUSTRIES

AG-30TT

Design and purpose: The AG-30TT is a heavy duty full height high security Tandem Turnstile. A tandem turnstile is essentially two turnstiles in one and has a smaller foot print than two single turnstiles put together. The function of the AG-30TT is to provide controlled access when entering or exiting a facility where high flow traffic is present. It can achieve this both mechanically (no access control system/software) such as a pool gate where the passage would be used for only exiting and no entry. Or electronically (with an access control system, card readers, fingerprint readers etc.) for keeping track of who is on and off site. It is constructed with American Pride right here in the USA.

Standard Features:

- Modular locking mechanism, can be configured fail safe or fail secure as well as clockwise or counter clockwise.
- Key override, the turnstile can be unlocked manually by key, in either direction for service or temporary events where locking isn't required.
- Plastic end caps on all arms
- Durable galvanized finish
- All stainless-steel hardware
- Card reader mounting plates included

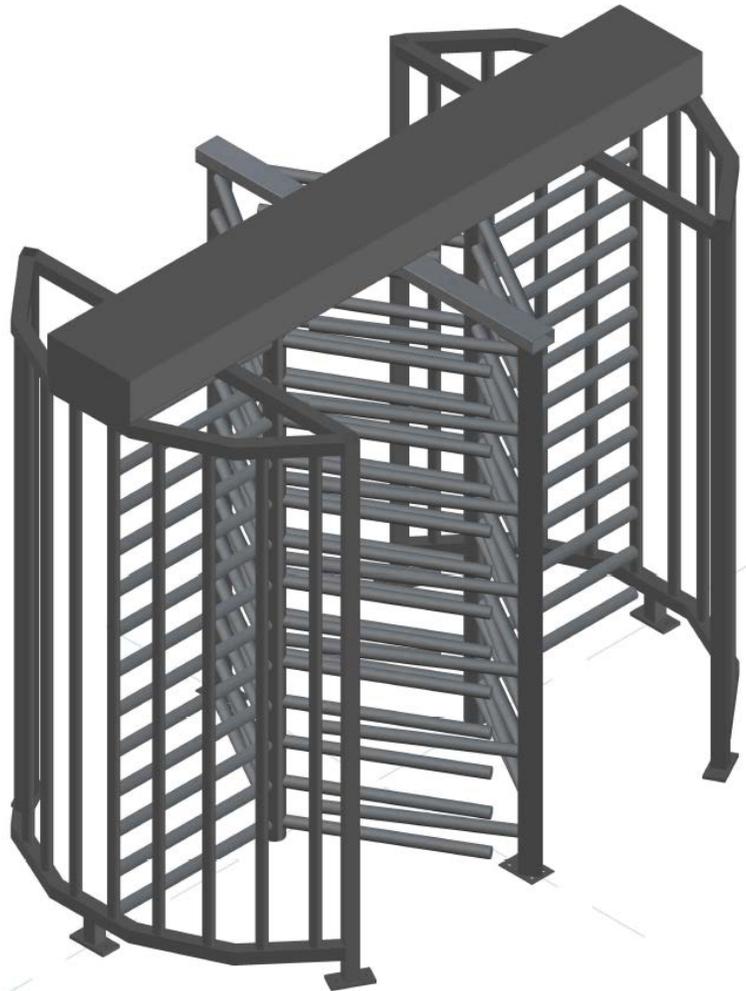

- A tandem turnstile is used when more than one turnstile is needed in high traffic areas. It also has a reduced foot print of 8' 6" wide. Where two single turnstiles side by side have a total width of 11'.

OUTLAW INDUSTRIES
3475 S. CALHAN HWY
CALHAN, CO 80808
JESSEJAMES@OUTLAWINDUSTRIES.COM

JESSE JAMES: 719-367-4812
JESSE JAMES JR: 720-278-8811
SHOP: 719-683-2498

OUTLAW INDUSTRIES

AG-30TT

Additional Features:

- A counter for the locking mechanism
- Cold weather package
- Hinged lid
- Portable base
- Electronically controlled both directions
- Can be configured for 110v or 220v
- Stainless Steel construction available
- Powder coating over galvanizing
- Several powder coat color options (see our color chart for options)
- The 30" passage is standard but custom passage widths such as 28" and 36" can be accommodated


Electrical Specifications:

- Input voltage: 100-220 VAC
- Frequency: 50/60 HZ

- Operating Voltage: 30 VDC
- Operating Current: 0,2A

Construction:

- American made steel, fabricated in America
- Extra thick mounting brackets for added security
- Splined shaft, collar, bearing, and bottom flange are corrosion resistant stainless steel
- All fastening hardware stainless-steel

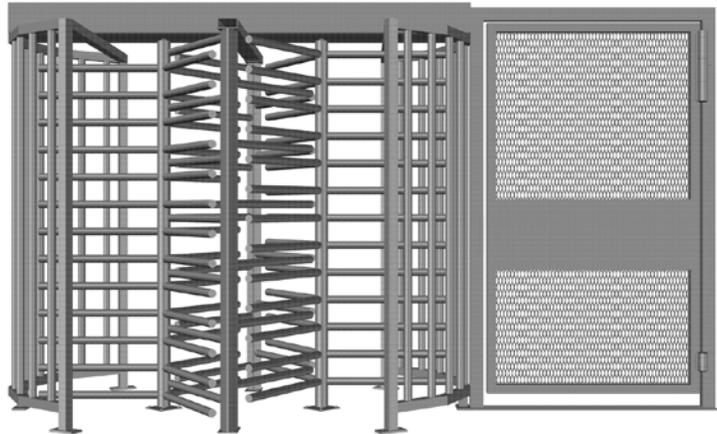

- A tandem shown with a 48" ADA gate (sold separately)

OUTLAW INDUSTRIES
3475 S. CALHAN HWY
CALHAN, CO 80808
JESSEJAMES@OUTLAWINDUSTRIES.COM

JESSE JAMES: 719-367-4812
JESSE JAMES JR: 720-278-8811
SHOP: 719-683-2498