

General

- Detector Type Passive infrared
- Filter Technology Digital Signal Processing (DSP)
- Detector Lens Curtain-type Fresnel lens
- Detection Range
 - Narrow Targeting Area 3 m (10 ft)
 - Whole Body 6 m (20 ft)
- Piezo Buzzer 90 dB at 28 VDC, 5-28 VDC, 20 mA (XL & XL2 only)
- Main Relay Contacts SPDT, 1A max @ 30 VDC max
- Main Relay Timer Adjustable, 0.5 to 60 seconds
- Main Relay Recycle Timer Fixed, 0.75 seconds off
- Lock Control Relay Available on LT2 and XL2 models only, solid-state relay, N.C., 2A max @ 30 VDC, timed at 2 seconds fixed
- Tamper Switch N.C., 100 mA max @ 30 VDC max
- Indicator Light Red/Green LED
- Mounting Optional backplate available for mounting the T.REX on a standard single-gang electrical box

Physical

- Dimensions (H x W x D) 4.5 x 19 x 4.75 cm (1.75 x 7.125 x 1.875 in)


Electrical

- Power Consumption 12-28 VDC, 50 mA

Regulatory

- Certifications UL294, CE, FCC, ULC

Product Diagram

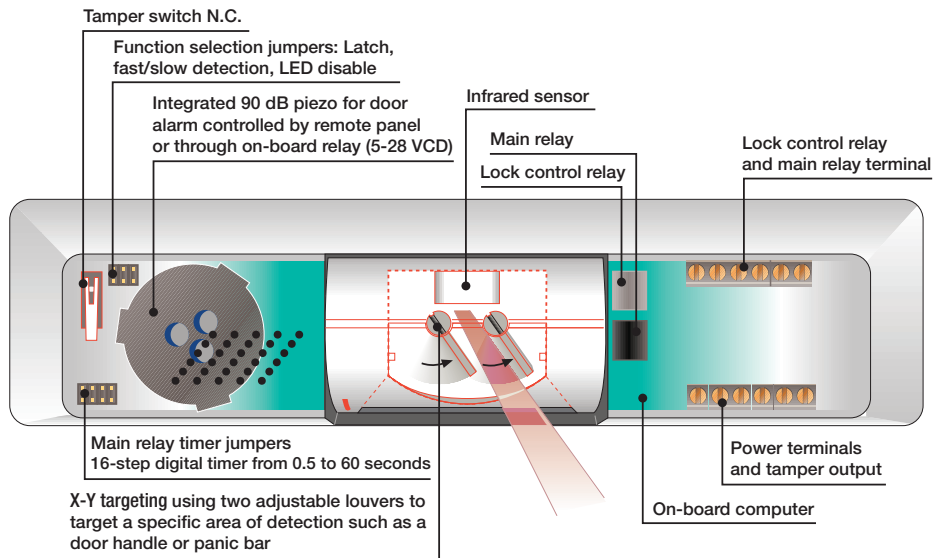

T.REX Model

Related Products



EntraPass Security Software



iIoProx Readers