

dTower



design
security
flexibility

dTower

Access control gate specially designed with small footprint and enhanced security. Using the comfort and safety of the “swing gate” type of pivoting doors, dTower offers maximum flexibility in the minimum space used.



dTower Single 500

500mm wide passage, requiring only a module to control access.



dTower Pair 500

500mm wide passage. 2 modules with 250mm each, offering faster opening and occupying less space with open doors.



dTower Pair 900

900mm wide passage, suitable for people with special needs. 2 closing modules.



4-tower, 3-door configuration option



CHARACTERISTICS

- Innovative design, small footprint
- Motorized system using advanced control technology
- Reinforced structure for attachment to the floor
- Available in stainless steel and carbon steel painted in epoxy powder
- Available with polycarbonate doors 10 mm thick - more impact resistant
- Fast door opening
- Guidance pictograms (2-way)
- Operating pictograms (authorized access)
- Beep indicates access permitted or denied
- Bidirectional doors
- Accepts closing/opening door sensors
- Safebox for card collection (optional)
- Allows the installation of proximity reader
- Available with 2D barcode reader (optional)
- Easy integration with access controllers

Manufacturer reserves the right to modify any information contained in this catalog without prior notice.

dTower

DIMENSIONS

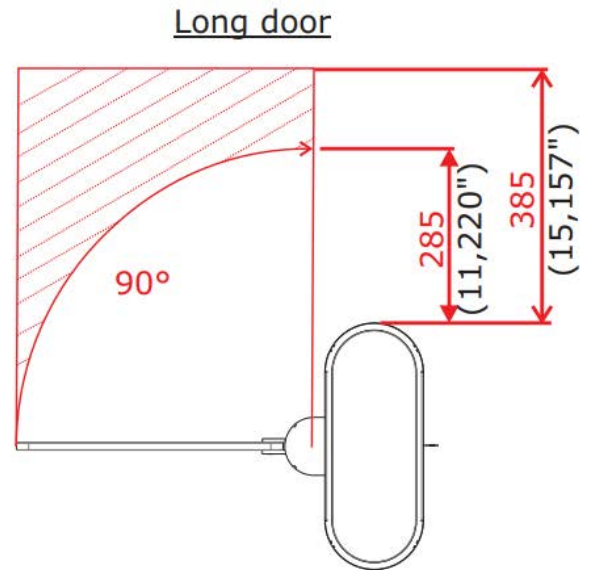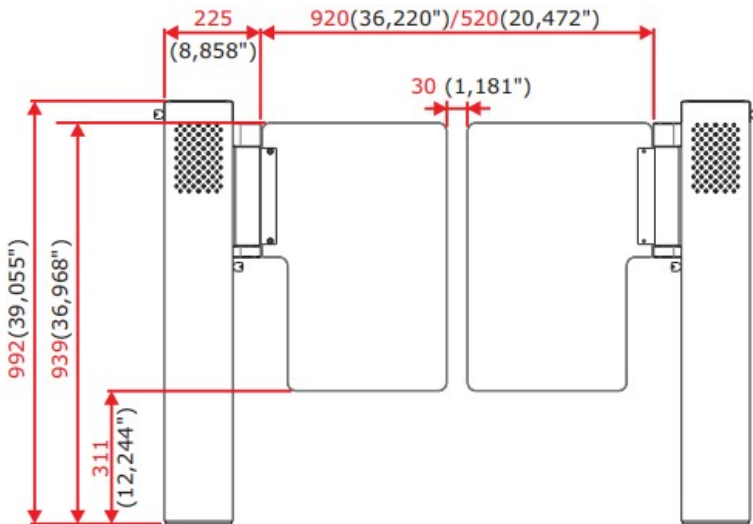

Short door

