

Client Name :
Project Name :
Date :
Filled by :

QUESTIONNAIRE

OST/OTT Full Height Turnstiles

Operation:

- ☐ Electrical (logic control) **Standard, in stock**
- ☐ Mechanical (unidirectional: exit free, entry locked or vs versa)

Passage:

- ☐ Single **in stock**
- ☐ Double (Tandem)

Arms:

- ☐ 3 Sections Standard (120 degrees) **in stock**
- ☐ 4 Sections Standard (90 degrees)

Venue:

- ☐ Indoor
- ☐ Outdoor
 - ☐ Without Canopy **Standard, in stock**
 - ☐ With Canopy
 - ☐ Clear Canopy
 - ☐ Full covered Roof

Emergency Mode

- ☐ Fail Safe **standard, in stock**
- ☐ Fail Lock

Installation Base

- ☐ W/o base plate **standard**
- ☐ W/ base plate
 - ☐ Flat plate
 - ☐ Forklift plate
 - ☐ Pre-installation frame (for concrete)
 - ☐ Mud control grid

Weather Conditions

- ☐ Regular **Standard**
- ☐ Extreme Cold (lower than -40F)-heater needed-
- ☐ Extreme Hot (more than 104F)-cooler needed-

Packing method

- ☐ Assembled
- ☐ Unassembled **Standard**

Material/ Finish

- ☐ Stainless Steel
 - ☐ AISI 304 **Standard, in stock**
 - ☐ AISI 316 (good for corrosive environments such as pools, ports etc)
- ☐ Hot Dip Galvanized
 - ☐ Basic **Standard, in stock**
 - ☐ Powder coated (ask for the requested RAL code)

Material/ Finish

- ☐ Stainless Steel
 - ☐ AISI 304 **Standard, in stock**
 - ☐ AISI 316 (good for corrosive environments such as pools, ports etc)
- ☐ Hot Dip Galvanized
 - ☐ Basic **Standard, in stock**
 - ☐ Powder coated (ask for the requested RAL code)

Passage widths (for 3 sectional version)

- ☐ 26.38 inches (670 mm), **in stock**
- ☐ 24.80 inches (630 mm)
- ☐ 23.62 inches (600 mm)

Passage widths (for 4 sectional version)

- ☐ 25.59 inches (650 mm), **in stock**
- ☐ 24.00 inches (610 mm)
- ☐ 22.83 inches (580 mm)


Access Control

- ☐ With Reader
 - ☐ No brackets
 - ☐ With Brackets

Bracket Size

- ☐ Size: 5.90 x 7.87 inches Standard, in stock
- ☐ Custom size (need reader measurements) Please add to notes
- ☐ With Push Button

Bracket Locations

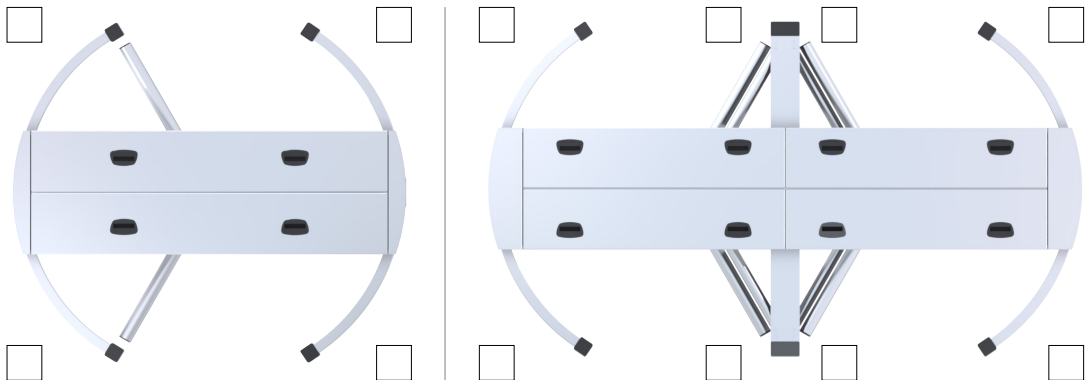

Notes: