


SCHEDULED FINISHES						
	DESCRIPTION	MANUFACTURER	PRODUCT NAME / NUMBER	COLOR/ FINISH	SIZE	COMMENTS
WALL						
EP1	EPOXY PAINT	SHERWIN WILLIAMS	ARMORSEAL	SW 7621 ON THE ROCKS	-	
MP1	INSULATED METAL PANEL	KINGS PAN	CEANITONE QUARTZ FINISH	ARCHITECT TO PICK FROM FULL PRODUCT RANGE	2" THICKNESS	
P1	GENERAL PAINT	SHERWIN WILLIAMS	SW 7551 GREEK VILLA	EGGSHELL	-	
P2	HOLLOW METAL DOORS AND FRAMES	SHERWIN WILLIAMS	MATCH ARCHITECTS SAMPLE	SEMI GLOSS	-	
WD1	WOOD WALL PANELS	MILLWORK	PLYWOOD - GRADE A - FIRE RATED	EGGSHELL	4' X 8'	PAINTED, P1
BASE						
RF1	RUBBER FLOORING	PROTECT ALL	FLOORING WITH INTEGRAL COVE BASE	HEAVY GRAPHITE	SEE ELEVATION	PROVIDE TOP CAP AT ALL EXPOSED EDGES CORNERS
FLOOR						
RF1	RUBBER FLOORING	PROTECT ALL	FLOORING WITH INTEGRAL COVE BASE	HEAVY GRAPHITE	SEE ELEVATION	5' X 8' SHEET - INSTALL WITH BACK AS FINISH FACE
SC1	SEALED CONCRETE	SHERWIN WILLIAMS	ARMORSEAL	CLEAR	-	
MILLWORK						
PL1	PLASTIC LAMINATE	FORMICA	8844 WR	AGED ASH - WOODBURSH	-	MARINE GRADE PLYWOOD SUBSTRATE
SS	STAINLESS STEEL	MILLWORK	STAINLESS STEEL	SCRATCHY MATTE	1/2" THICKNESS	
SU1	SOLID SURFACE	WILSONART	R232SS	PLATE GREY	3/4" THICKNESS	
WD2	WOOD WORKBENCH	MILLWORK	HARDWOOD MAPLE	CLEAR	-	4 X 4 LEGS WITH 2 X 6 FRAMES WITH 1" PLYWOOD TOP


B.STATION WALL TYPES SCHEDULE Y2					
TYPE	STC	UL#	DESCRIPTION	RATING	PLAN
METAL STUD FURRING					
H28			1-5/8" METAL STUDS @ 16" O.C. W/ 5/8" GYPSUM BOARD, ONE SIDE ONLY. EXTEND GYP. BD. TO DECK ABOVE		
H48			1-5/8" METAL STUDS @ 16" O.C. W/ 5/8" GYPSUM BOARD, ONE SIDE ONLY. EXTEND GYP. BD. TO DECK ABOVE		
H5D			8" METAL STUDS @ 16" O.C. W/ 5/4" PLYWOOD, ONE SIDE ONLY. EXTEND GYP. BD. TO DECK ABOVE. FILL CAVITY W/ 6" FIBERGLASS SOUND ATTENUATION BLANKET. 2" SPRAY FOAM INSULATION APPLIED TO SUBSTRATE, ASSEMBLY SET 1" FROM SUBSTRATE		

FLOOR PLAN LEGEND	
	EXISTING BASE PLATE EMBEDS ON MAT SLAB FOR FUTURE FREE FORM INSTALLATION
	RUN CONDUITS WITHIN TOPPING SLAB FROM JUNCTION BOX TO STUD UP LOCATIONS SHOWN
	FLOOR DRAIN LOCATIONS. SEE PLUMBING DRAWINGS
	REMOVABLE QUELING GUARD BY OWNER
	REMOVABLE CALVANIZED TEMPORARY QUELING HANDRAIL
	REMOVABLE CALVANIZED TEMPORARY RAILING. SEE VERTICAL CIRCULATION DETAILS SHEET
	CALVANIZED POWDER COATED SAFETY RAILING. SEE VERTICAL CIRCULATION DETAILS SHEET
	TOPPING CONCRETE SLAB
	TOPPING SLAB CONTROL JOINT
	STOPPING POINT GRID
FINISH KEY	
	WALL
	FLOOR
	BASE

WALL TYPES LEGEND		
3 1/8" STUD (1) 5/8" FLANGE, L/360, Spd	33 mls	15'-4" High (Max.)
40 mls	16'-8" High (Max.)	
54 mls	17'-10" High (Max.)	
40" STUD (1) 5/8" FLANGE, L/360, Spd	33 mls	22'-8" High (Max.)
40 mls	24'-0" High (Max.)	
54 mls	25'-4" High (Max.)	
WALL TYPES NOTES		
1. ALL WALL DIMENSIONS SHOWN ON DRAWINGS ARE TO CENTER OF STUD UNLESS NOTED OTHERWISE.		
2. WALL TYPE TO CONTINUE AT DOOR & WINDOW OPENINGS (TOP & BOTTOM) UNLESS NOTED OTHERWISE.		
3. FOR ANY WALL MISSING A WALL TYPE DESIGNATION, PROVIDE WALL TYPE ETC.		
4. WHERE METAL STUD FURRING OCCURS ADJACENT TO A CMU WALL, A COMPLETE SEPARATION BETWEEN WALLS IS REQUIRED. DO NOT ATTACH STUD WALL, FINISH SIDE.		
5. WHERE FREE-STANDING METAL STUD FURRING OCCURS, PROVIDE HORIZONTAL METAL STRAPPING @ 4'-0" O.C. (VERTICAL).		
6. THE INTENT OF ACOUSTICAL PARTITIONS IS TO ACHIEVE AS HIGH AN STC RATING AS POSSIBLE WITHOUT USING ACOUSTICAL SEALANT. RUN GYPSUM BOARD AS TIGHT AS POSSIBLE AT FLOORS, CEILINGS & PENETRATIONS.		
7. U.I.D. USE WATER RESISTANT GYPSUM BOARD (GREEN BOARD) AT ALL MET WALL LOCATIONS, TYP. INCLUDING BUT NOT LIMITED TO BATHROOM WALLS, WALLS WITH TILE OR STONE FINISH.		
8. PROVIDE BLOCKING IN WALLS AS REQUIRED FOR INSTALLATION OF MECH., PLUMB. & ELEC. EQUIP. AND SPECIALTIES.		

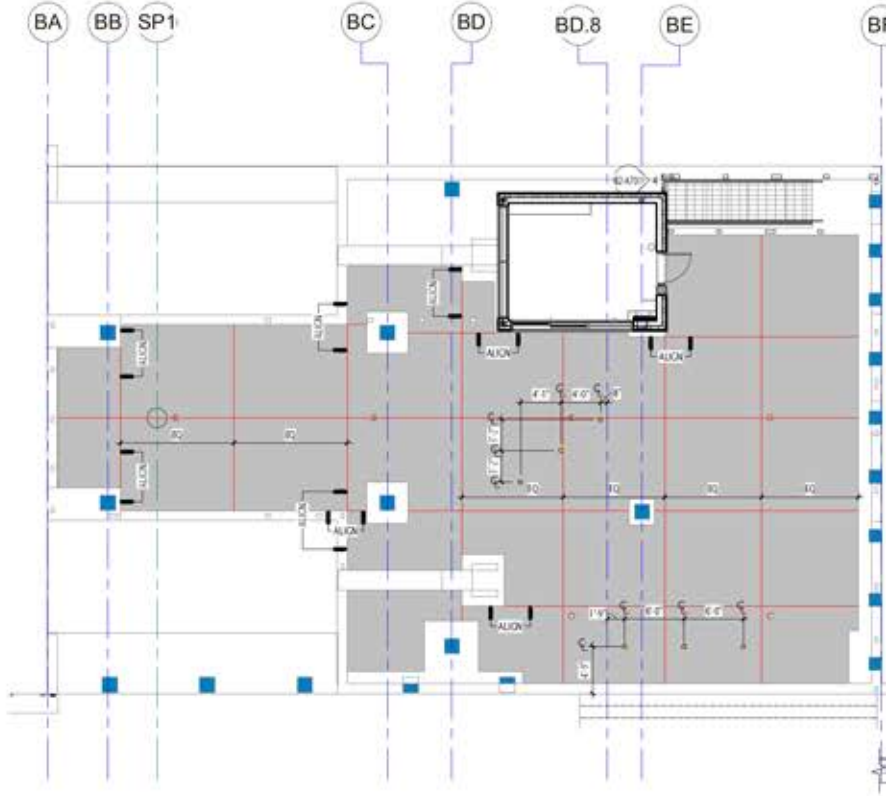

2 LEVEL ONE (LOADING) CONTROL JOINT PLAN
B2-A102 1/8" = 1'-0"

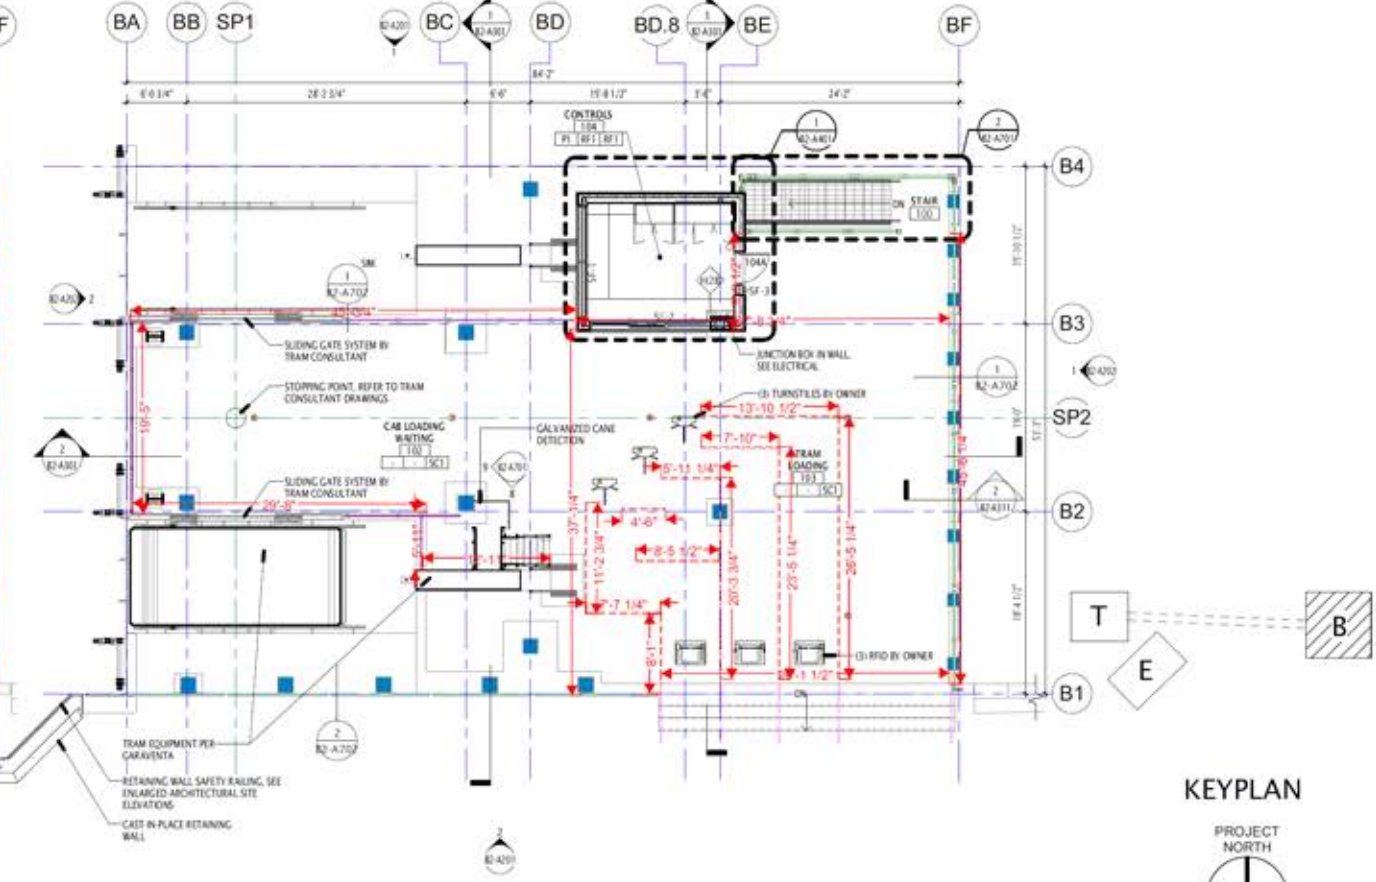

1 TRAM BOTTOM STATION - LEVEL ONE (LOADING) FLOOR PLAN
B2-A102 1/8" = 1'-0"

PHASE 2 - CONSTRUCTION DOCUMENTS 100% SET

BIG SKY - TRAM BOTTOM STATION

BIG SKY RESORT
50 BIG SKY RESORT RD
P.O. BOX 50001
BIG SKY, MT 59716

OWNER PROJECT NO.:
GSBS PROJECT NO.:
ISSUED DATE: 2020.06/01
10.31.2022

LEVEL 1 FLOOR PLAN (LOADING)