

TRIUMPH FULL HEIGHT

INDUSTRIAL TURNSTILE



- With a wide range of applications, the TRIUMPH is one our most popular turnstiles
- A combination of durability and reliability means that the TRIUMPH is the most widely used turnstile in mining industries, factories, building sites, and stadiums
- Exported worldwide



APPL	.ICATI	IONS

• Suited for applications requiring high volume access and high levels of security

 Used extensively in applications such as mines, factories, warehouses, colleges, building sites and stadiums

DESIGNED FOR

• Interior and exterior installations

• Severe operating conditions

AVAILABLE CONFIGURATIONS

• 3 arm (120°), 4 arm (90°) and 5 arm (72°)

• Single and double

SECURITY RATING

• 4 out of 5



WHAT YOU NEED TO KNOW WHEN BUYING A TURNSTILE

IN TERMS OF THE PRICE, IS THE TURNSTILE SUPPLIED COMPLETE OR ARE THERE ANY HIDDEN EXTRAS?

Our units are supplied 100% complete. Control panels are ready for power and data connections. Reader mounting brackets are available for full height turnstiles for the mounting of biometric systems, access readers, ticketing equipment, pushbuttons and coin or token acceptors.

WHAT ARE THE RUNNING COSTS?

With a long-established reputation for being exceptionally reliable and durable, Turnstar turnstiles are built to give years of cost-free and fault-free service with no routine maintenance. Our products are a flt-and-forget solution.

IS THIS TURNSTILE ROBUST ENOUGH FOR THE JOB? AM I GOING TO HAVE FAILURES DURING SERVICE?

Turnstar products are designed for the harshest of environments and have become the standard for Africa's mining industry, which is known for extreme operating conditions. Production is carried out by state-of-the-art CNC machinery and robotic welding, all of which provide products of the highest quality and to the tightest of tolerances.

HOW LONG IS THE GUARANTEE AND IS THIS AN EXTRA COST?

Turnstar's industry leading ten-year guarantee is included in the purchase price.

WHAT DOES THE GUARANTEE COVER?

All mechanical components, including ratchet disk and locking pawls, are covered by the Turnstar tenyear guarantee. The control panel, microswitches and solenoids are covered by a one-year guarantee.

CAN YOU TRUST THE TURNSTILE SUPPLIER?

Established in 1990, Turnstar has manufactured and sold over 50 000 turnstiles. Our customers range from the world's largest blue chip corporations to single-site retailers. As one of the world's leading manufacturers, we have an unrivaled reputation for outstanding products backed by superior customer service.

WILL THE TURNSTILE WORK WITH ALL TYPES OF ACCESS SYSTEMS?

Turnstar turnstiles operate with all forms of electronic access control, ticketing and time and attendance systems. In addition, they can be operated with pushbutton controls, remote transmitters and coin or token acceptors.

WHAT WILL HAPPEN TO THE TURNSTILE IN THE EVENT OF A POWER FAILURE?

The turnstile can be factory-set for either fall-secure (auto-lock on power failure) or fall-safe (auto-unlock on power failure) operation. The turnstile can also be unlocked by means of the mechanical key override which is supplied standard with the turnstile. A battery backup system is also available on request, which will provide normal operation under conditions of no power.

WHAT OTHER PRODUCTS ARE AVAILABLE WITH THE TURNSTILE

Turnstar manufactures standard and special design reader mounting brackets as well as pedestrian gates and security barriers for use with all our turnstiles. We also supply special colours, and manufacture turnstiles in custom sizes and designs.

WHERE CAN I FIND OUT MORE ABOUT THE UNBEATABLE VALUE FROM TURNSTAR?

Go to www.turnstar.co.za for more information on our product range, projects and blog.





UNIQUE FEATURES

ROTATION LOCKING MECHANISM

- CE conformity
- Ultra heavy-duty electromechanical rotation locking mechanism
- Bi-directional operation
- Designed by professional engineers
- Tried, tested and perfected over a period of over 20 years

RELIABLE TECHNOLOGY

- Suspended rotor technology eliminating stress on the base bearing
- Self-centering rotation system rotor returns to starting position after every rotation
- Shock absorbing rubber coupling system
- Anti-Trap® safety system no mid-rotation locking or trapping in the event of a power failure
- Programmable logic with user diagnostic features
- Mechanical key override clockwise and anti-clockwise directions (fail-secure)

DURABLE S FEATURES

- Zinc plated for corrosion resistance
- Ultra quiet, buffered solenoids and pawls
- Solenoids rated for 100% duty cycle
- · Case hardened locking disk and pawls eliminating any wear
- Factory settings need no further adjustment
- · No routine maintenance whatsoever, ever

GUARANTEED 🦃

MANUFACTURED TO LAST

- 10 year mechanical guarantee
- 1 year electrical guarantee

PERPETUAL BASE BEARING

• Fitted to all TRIUMPH turnstiles

RELIABLE TECHNOLOGY

• Combination of stainless steel and self-lubricating engineering plastics

DURABLE 🦙 FEATURES

- Designed for the harshest of conditions
- 100% corrosion resistant
- Unaffected by dust, dirt or moisture
- Self-lubricating

GUARANTEED 🦙 MANUFACTURED TO LAST

- Zero maintenance
- 10 year mechanical guarantee

TECHNICAL SPECIFICATIONS


POWER	220 Volt AC (110 Volt AC on request)	
FREQUENCY	50Hz / 60Hz	
POWER CONSUMPTION	50W (single turnstile) 100W (double turnstile) - fail-secure mode	
SOLENOID VOLTAGE	24 Volt DC (12 Volt DC on request)	
LOGIC VOLTAGE	24 Volt DC	
DIMENSIONS	Single turnstile: • 1 400mm wide x 2 125mm high • 1 430mm wide x 2 250mm high – recommended minimum opening size	
	Double turnstile: 2 150mm wide x 2 125mm high 2 180mm wide x 2 250mm high – recommended minimum opening size	
ROTOR DIAMETER	1 200mm	
ROTOR ARM CONFIGURATION	3 arm (120°) 4 arm (90°) 4 arm (72°) - ultra secure	
ROTOR ARMS	32mm diameter U-tube arms spaced 165mm apart	
WEIGHT	Single turnstile (4 arm): 160kg Double turnstile (4 arm): 255kg	
DESIGN	Modular bolt-together design for ease of transport and installation. Components can pass through a standard door. Can be packed in broken-down form either onto a pallet or into a crate for transport. Flat pack version allows for greater space saving during transport.	
SYSTEMS INTEGRATION	 Integrates with all access control and time & attendance systems Unlocking for entry / exit rotation controlled through normally open dry contact Transaction / rotation complete output Integral wireways with draw wires in place - no exposed wires 	

MANUFACTURING OPTIONS

ROTATION OPTIONS	 Electrically controlled bi-directional rotation (factory standard) Mechanically controlled uni-directional rotation by means of key override Free rotation 	
LOCKING OPTIONS	 Fail-secure auto-lock on power failure (factory standard) Fail-safe auto-unlock on power failure Each direction of rotation configurable for either fail-secure or fail-safe operation 	
FIRE ALARM OPTIONS	Free rotation when triggered indefinitely	
POWER OPTIONS	 Battery backup with two 12 volt 7Ah batteries connected in series Up to 1 000 transactions in fail-secure mode Up to 60 minutes operation in fail-safe mode 	
FLAT ROOF CANOPY OPTION	 Provides protection from the elements Anti-climb protection Low energy light on underside of canopy 	
SPECIAL PHYSICAL DESIGN OPTIONS	 Restrictor tubes for increased security (4 arm turnstile only) 180° rotation setting for extra walkthrough space (4 arm turnstile only) Special narrow single turnstile design for 1 200mm wide opening Special split cover for low ceilings Special internal mechanism dust cover for dirty environments Heavy-duty base for portability (with forklift channels) 	
ACCESSORY OPTIONS	 Card / proximity reader mounting bracket Biometric / fingerprint reader mounting brackets Single / double pushbutton in plastic housing LCD transaction counter with reset key switch Random search device 	
FINISH OPTIONS	 Mild steel w/ UV resistant polyester exterior powder coat finish (charcoal blue hammertone) Mild steel with hot dip galvanized finish 304 grade brushed stainless steel 316 grade brushed stainless steel other colours available on request 	

STAR QUALITIES

- 1 Rotalok® rotation locking mechanism and electronic control panel incorporates:
 - Anti-Trap® safety system
 - Suspended Rotor technology
 - Mechanical key override
 - Shock absorbing rubber coupling
- 2 Lockable top cover
- 3 Mechanical key override
- 4 Shock absorbing rubber coupling
- 5 32mm diameter U-tube arms spaced 165mm apart
- 6 Access control reader mounting position
- 7 LED indicator light mounting position
- 8 Rotarun® perpetual base bearing
- 9 Wiring side entry point
- 10 Wiring bottom entry point
- **11** Floor bolting positions 7 Off
- 12 Wall bolting positions 2 Off

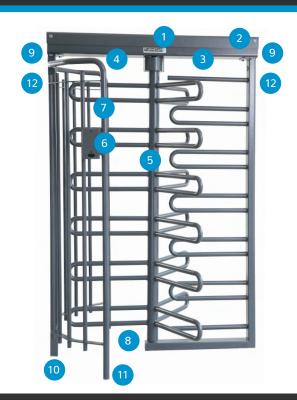

THE TRIUMPH RANGE



TRIUMPH 3 SINGLE



TRIUMPH 4 SINGLE



TRIUMPH 5 SINGLE



TRIUMPH 4 DOUBLE



TRIUMPH PORTABLE RANGE

TRIUMPH RANGE

TRIUMPH SINGLE RANGE TRIUMPH DOUBLE RANGE 1 430mm Recommended opening width 2 180mm Recommended opening width Turnstile width 1 400mm Turnstile width 2 150mm ... C Recommended opening height 2250mm Recommended opening height 2 250mm D D Turnstile height 2 125mm Turnstile height 2 125mm Ē Headroom 1 986mm Headroom 1 986mm TRIUMPH 3 SINGLE TRIUMPH 3 DOUBLE В В Ε D C Ε D C TRIUMPH 4 SINGLE TRIUMPH 4 DOUBLE В D Ε D С TRIUMPH 5 SINGLE TRIUMPH 5 DOUBLE В В D Ε D C

Due to our policy of continuous improvement, products are subject to change without notice. Custom designs available on request