



ZRW6000

Flap Barrier with Modular Design



RFID



Fingerprint



QR code



Palm
verification




Visible light
facial recognition

ZRW6000 is a flap barrier with a module design that utilizes fast switching between different readers. Reader's installation can be completed with mere pull-out and plug-in. After installing the corresponding readers, ZRW6000 can support multiple verification methods, including RFID, fingerprint, QR code, palm verification and visible light facial recognition. Especially, palm verification and visible light facial recognition can realize touchless entrance control that helps avoid bacteria or germs on contaminated surfaces.



RFID



Fingerprint



QR code



Palm verification




Visible light facial recognition

Specifications

Power Requirements	AC 100 ~ 120V / 200 ~ 240V, 50 / 60Hz
Working Temperature	-28°C ~ 60°C
Working Humidity	5% ~ 80%
Working Environment	Indoor / outdoor (if sheltered)
Speed of Throughput	Maximum 30 / minute
Lane Width (mm)	23.6 in
Dimensions (L*W*H)	55 * 47 * 39 in
Dimension with Packing (L*W*H)	59 * 31 * 49 in
Weight with Packing	342 lbs
LED Indicator	Supported
Cabinet Material	SUS304 Stainless Steel
Lid Material	SUS304 Stainless Steel + Acrylic
Barrier Material	Acrylic (optional: tempered glass)
Barrier Movement	Retracting
Emergency Mode	Supported
MCBF	2 million
Warranty	1 year

Dimensions (in, mm)

ZRW6000 Single Lane

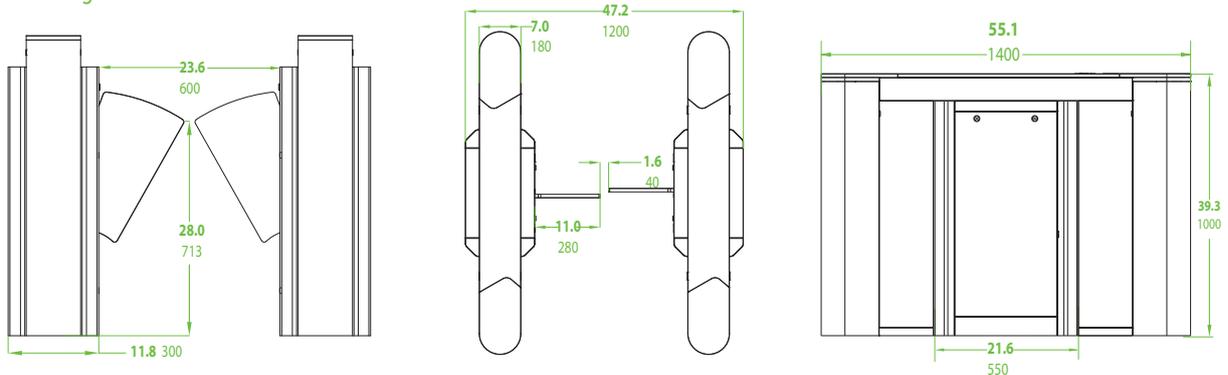

ZRW6200 Center Lane Expansion Module

