


## PGRM POLE MOUNT

for SOLAR PANEL MOUNTING



- The PGRM Series Pole Mount can be used to mount up to 6 solar modules with a frame thickness between 1.18" and 2"
- Install up to 92 square feet of modules on a single 4" Schedule 40 pole and up to 130 square feet of modules on two 4" schedule 40 poles
- Suitable for wind speeds up to 115 MPH
- For high wind locations add an additional vertical pole
- Tilt angle can be adjusted from 0° to 60° and is easily adjusted seasonally
- All sizes can ship by UPS Ground
- Simple one-person installation and adjustment

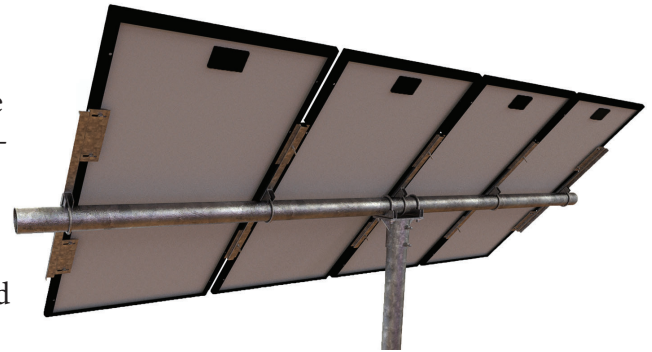

User supplies 4" schedule 40 steel pipe(s) for vertical pole and a 3" schedule 40 steel pipe for the horizontal beam.



Calculation of the required horizontal beam length (L) in inches:

**$L = W \times N + (N + 1) \times 1.4$**  where N = number of modules and W = module width in inches

| Part Number  | Description                                    |
|--------------|------------------------------------------------|
| UNI-PGRM/1P1 | POLE MOUNT FOR 1 MODULE WITH 1 VERTICAL POLE   |
| UNI-PGRM/2P1 | POLE MOUNT FOR 2 MODULES WITH 1 VERTICAL POLE  |
| UNI-PGRM/3P1 | POLE MOUNT FOR 3 MODULES WITH 1 VERTICAL POLE  |
| UNI-PGRM/4P1 | POLE MOUNT FOR 4 MODULES WITH 1 VERTICAL POLE  |
| UNI-PGRM/5P1 | POLE MOUNT FOR 5 MODULES WITH 1 VERTICAL POLE  |
| UNI-PGRM/5P2 | POLE MOUNT FOR 5 MODULES WITH 2 VERTICAL POLES |
| UNI-PGRM/6P1 | POLE MOUNT FOR 6 MODULES WITH 1 VERTICAL POLE  |
| UNI-PGRM/6P2 | POLE MOUNT FOR 6 MODULES WITH 2 VERTICAL POLES |
| 70-0300-PGM  | ADDITIONAL POLE CAP FOR HIGH WIND LOCATIONS    |