
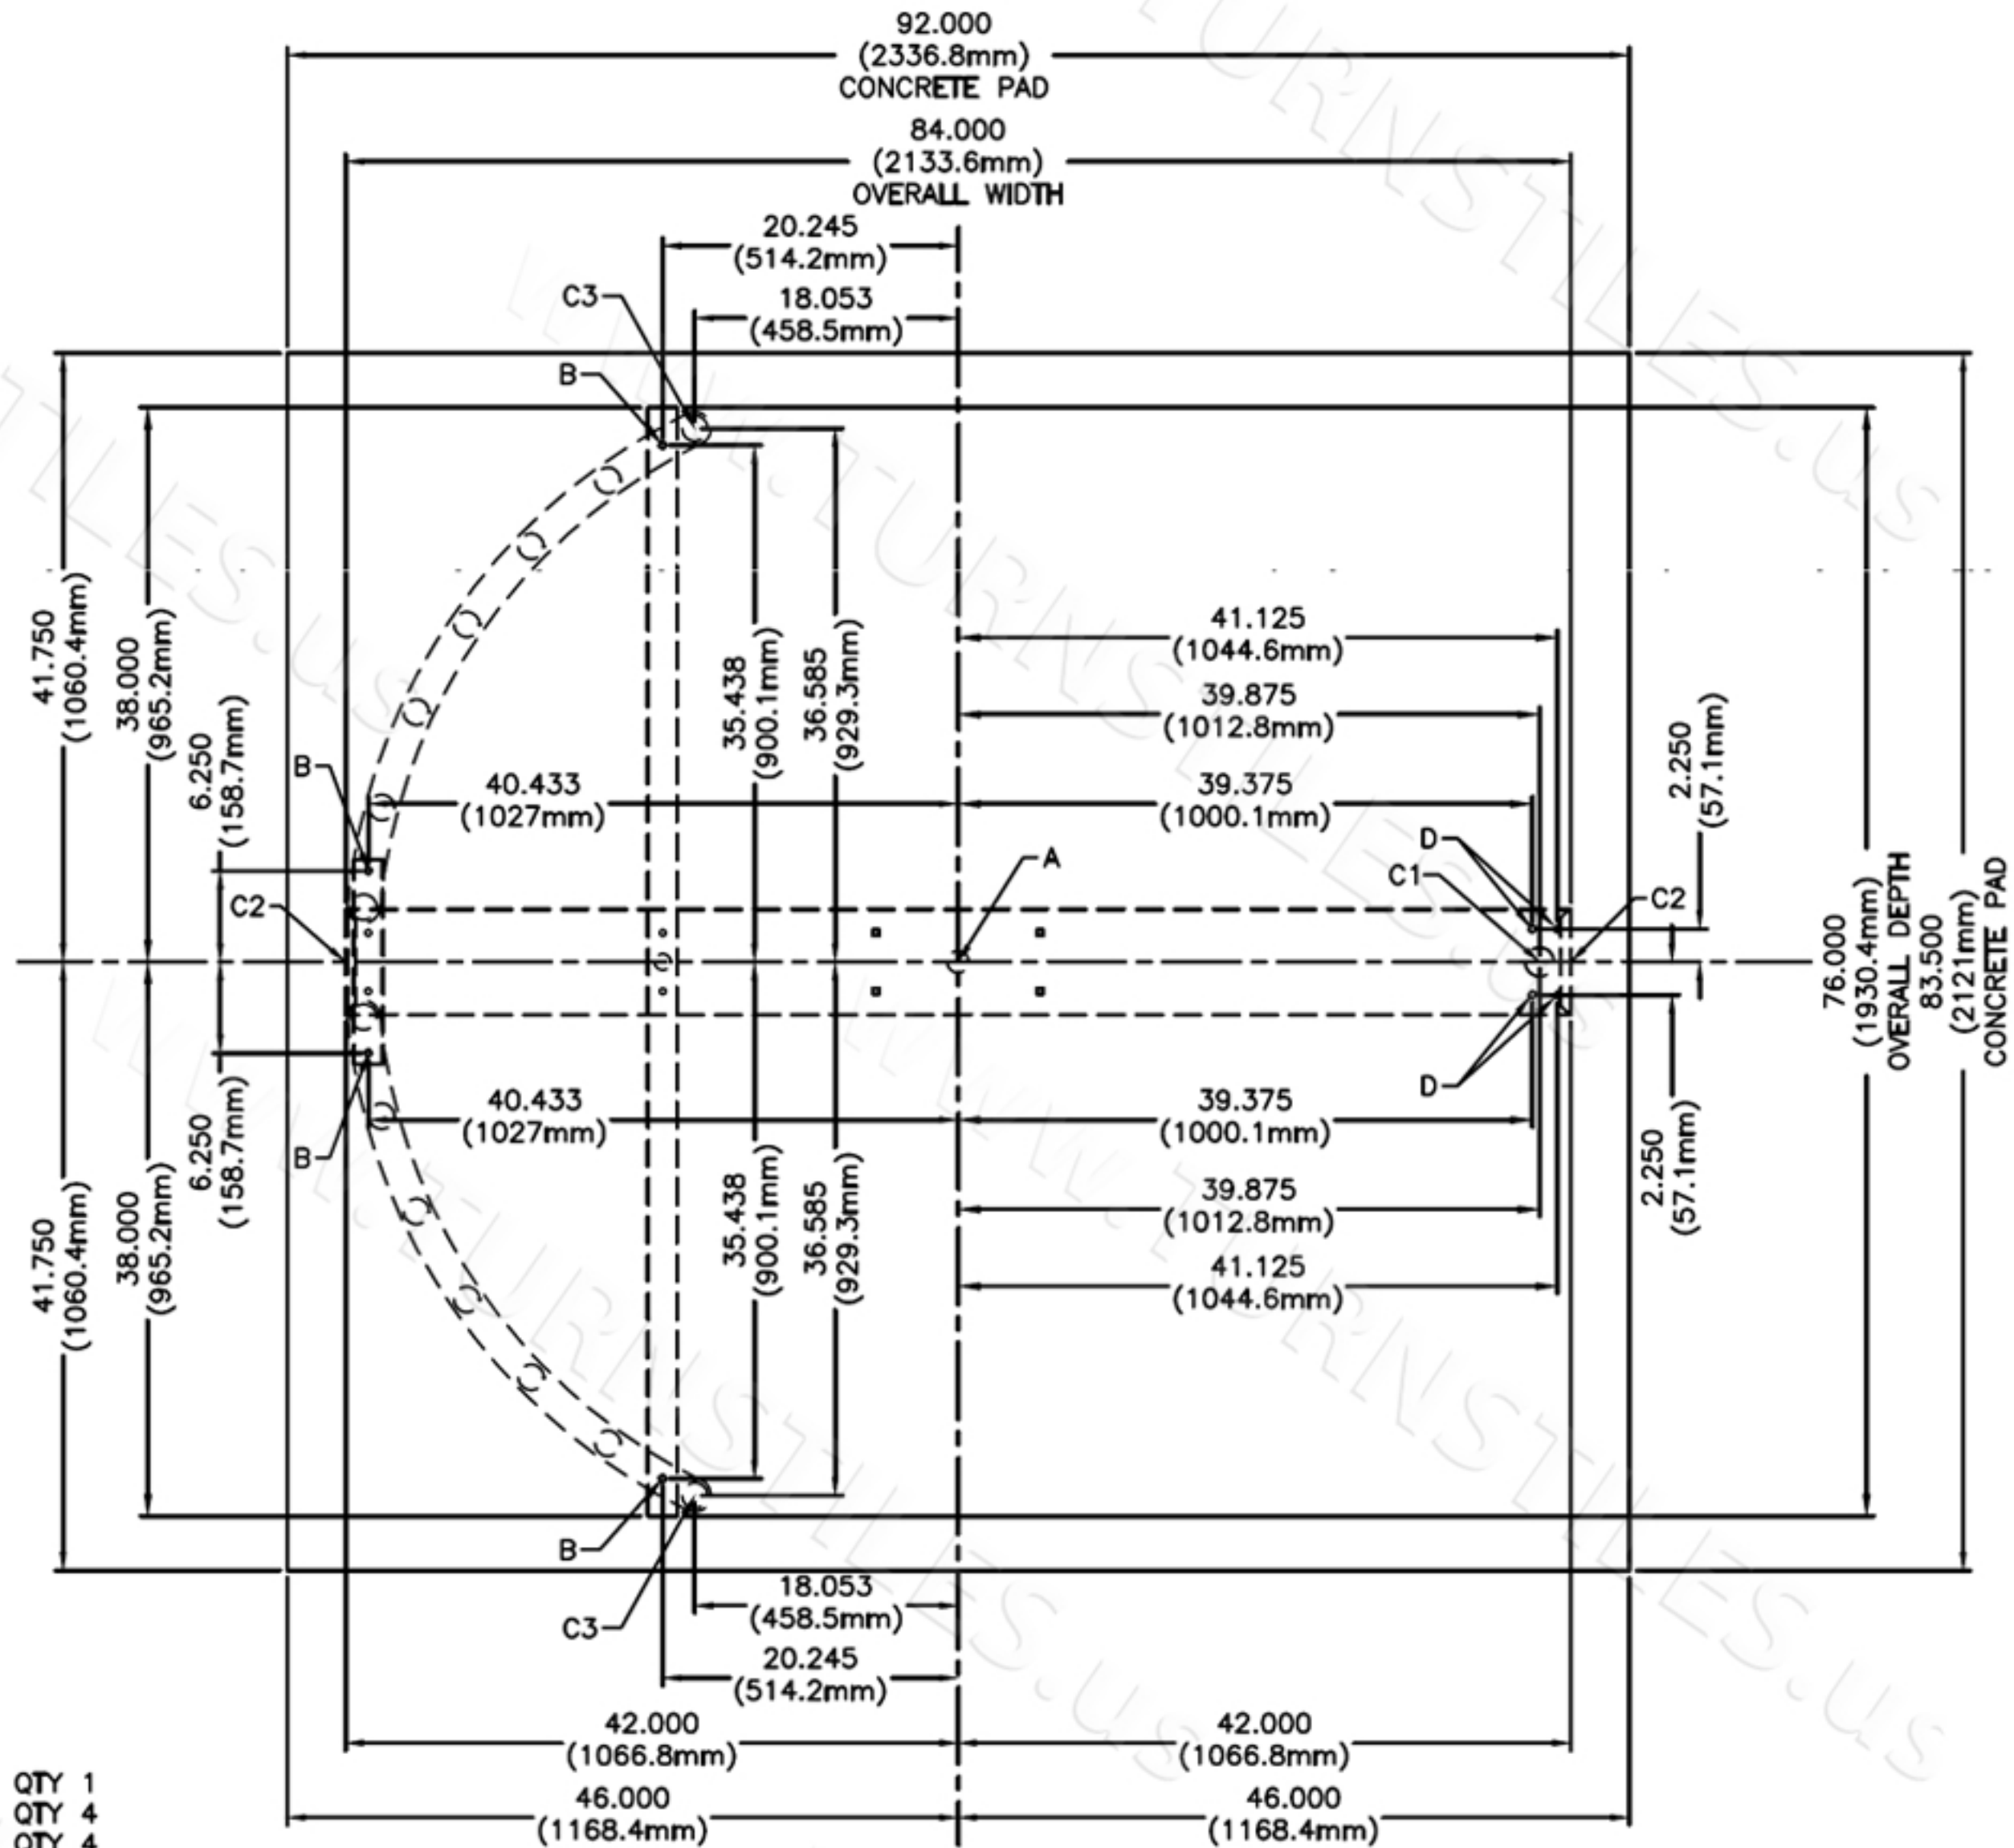


FOR USE ON GALVANIZED OR  
POWDER COATED HS439-S MODELS

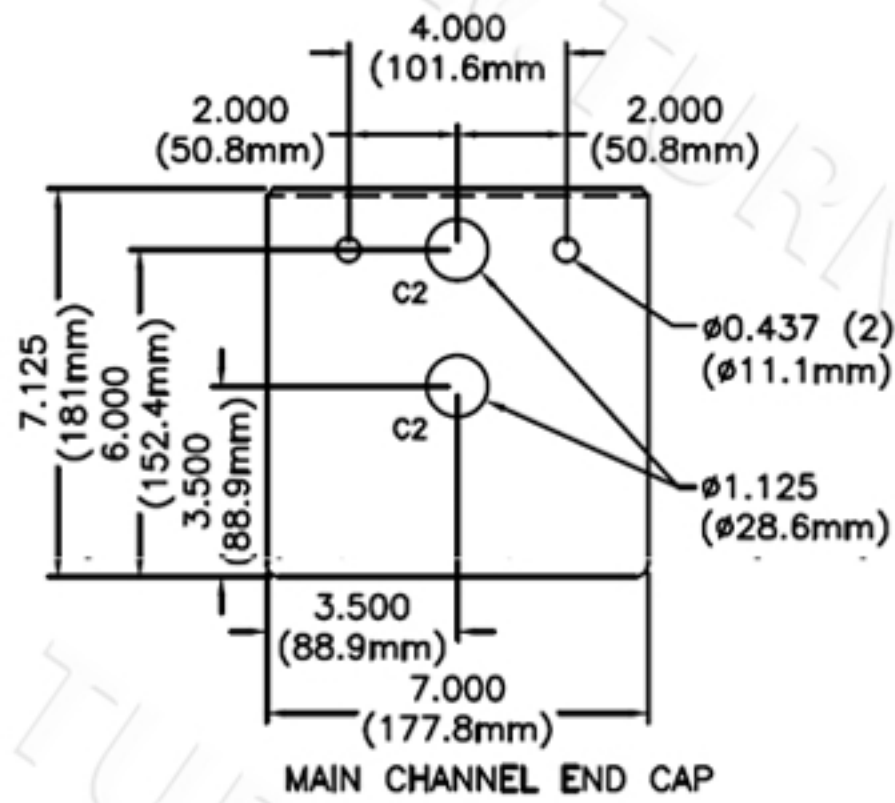

**ANCHOR POINTS**

- A = ø.625 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 1
- B = ø.375 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 4
- D = ø.500 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 4

**SUGGESTED CONDUIT LOCATION**

- C1 = THROUGH VERTICAL BARRIER (PREFERRED)
- C2 = THROUGH MAIN CHANNEL END CAP (TYP BOTH SIDES)
- C3 = THROUGH VERTICAL YOKE TUBE

**CONCRETE PAD NOTE:**

POUR PAD 4.000 (101.6mm) - 6.000 (152.4mm) THICK,  
AND INSURE IT IS LEVEL ±.125 (3.1mm)

AUTHORIZED SIGNATURE: \_\_\_\_\_ DATE: \_\_\_/\_\_\_/\_\_\_

FIRST DRAWN	BY
10-20-18	LCIII
REVISED	BY
COPYRIGHT © TURNSTILES.US Copyright © Turnstiles.us All rights reserved. Reproduction or translation of this work without the express written permission of TURNSTILES.US is unlawful and is an infringement of intellectual property belonging to TURNSTILES.US. All drawings and/or designs are restricted for use exclusively with a purchase, installation, and/or support from Turnstiles.us. Any other use of these materials is a violation of copyright law. Request for additional information should be addressed to the Legal Department, Turnstiles.us.	

**TURNSTILES.US**  
SECURING THE USA and the GLOBE since 1989  
www.TURNSTILES.us  
Call: 303-670-1099 | Text: 303-918-9787  
patrick.mcallister@turnstiles.us

EQUIPMENT DETAILS	
www.TURNSTILES.us HS439 Single Turnstile Anchor, Base, and Concrete Pad Detail	
DRAWING:	HS439 Single Turnstile ABC DET
DATE:	06-03-26
PAGE:	1 OF 1