

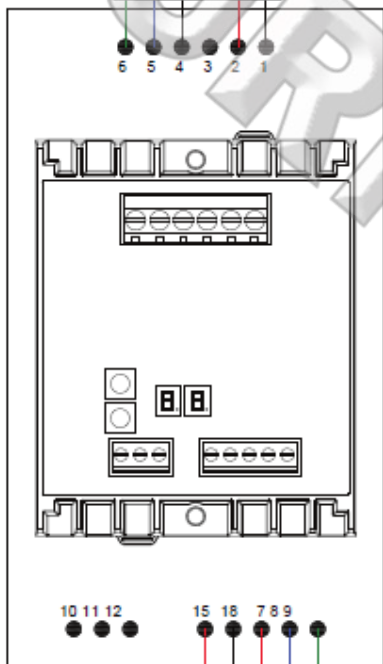


Fail-open module



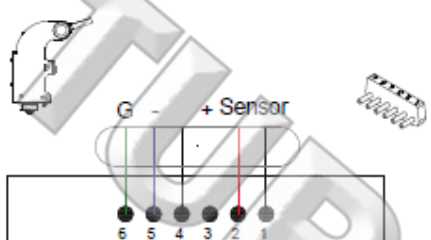


110V AC  
50/60Hz  
(Standard U.S.A.)

NO dry contact momentary  
Min. requirements:  
Volts: 30V DC  
Amps: 0,2A  
Min. impulse length: 1 sec

*Supports up to 230VAC for international applications*

Fail-close module

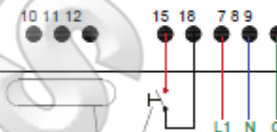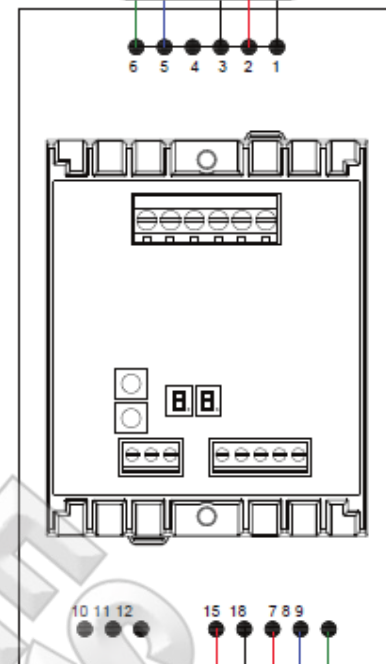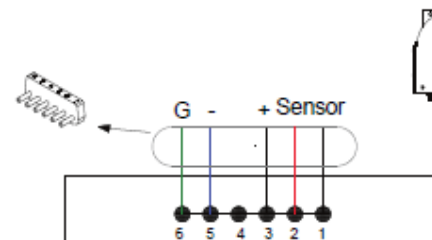

110V AC  
50/60Hz  
(Standard U.S.A.)

NO dry contact momentary  
Min. requirements:  
Volts: 30V DC  
Amps: 0,2A  
Min. impulse length: 1 sec

Connection to counter-module.  
Connect to "L" for CW-module.  
Connect to "R" for CCW-module.

**SIMPLE TURNSTILE  
WIRING DIAGRAM  
HD SERIES CONTROL HEAD**

**www.TURNSTILES.us**

**8641 South Warhawk Rd.  
Conifer, CO 80433  
Patrick McAllister Tel:303-670-1099**